



## **OZOPEN- M TANK Ozone Generators**



**Ozone Technology the World Can Afford**

600 Robitaille – Shefford – Qc – Canada J2M 1X2 Tel: 450-378-6825 Fax: 450 -777-0264

Http: // [www.ozomax.com](http://www.ozomax.com)

## OZOPEN Portable Ozone Generators



OZOPEN WITH ACCESSORIES

**Generates ozone & mixed oxidants INSITU**

**Treat a glass of water or a large jug quickly or tank and easily. Requires only a source of electricity. No need for any other equipment.**

**Kills harmful bacteria & viruses within minutes**

**Removes odour and bad taste from water**

**Portable unit can be used at home, at the office, while travelling...and can even be operated using solar panels!**

!

*Clean, chemical-free water the way nature intended.... At a price everyone can afford!*


The OZO-PEN product line is based on OZOMAX's revolutionary patented INSITU ozone technology and other Patent pending follow-ups. These one-of-a-kind portable ozone generators produce ozone directly in water so, unlike conventional ozone generators, there is no need for compressors, air dryers, oxygen concentrators . This makes the unit completely portable and hassle-free.

Along with ozone, its unique design allows the production of hydrogen peroxide, hydroxyl radicals and other mixed oxidants. Together, the ozone and the mixed oxidants, destroy harmful bacteria and viruses that may be present in the water in a matter of minutes. In addition, these powerful oxidizing agents rid the water of colour, offensive smells and bad taste...The process is so quick and effective that anyone can produce clean, safe drinking water right in their own kitchen. Moreover, the OZO-PEN is so light and compact that it can be taken to any place where it is needed: at the office, at camp, or while travelling abroad.

The OZO -PEN product line includes:

- 1- OZO-PEN Standard model
- 2- OZO-PEN Terminator
- 3- OZO-PEN Universal
- 4- OZOPEN-TANK

# OZOPEN Septic water Disinfection

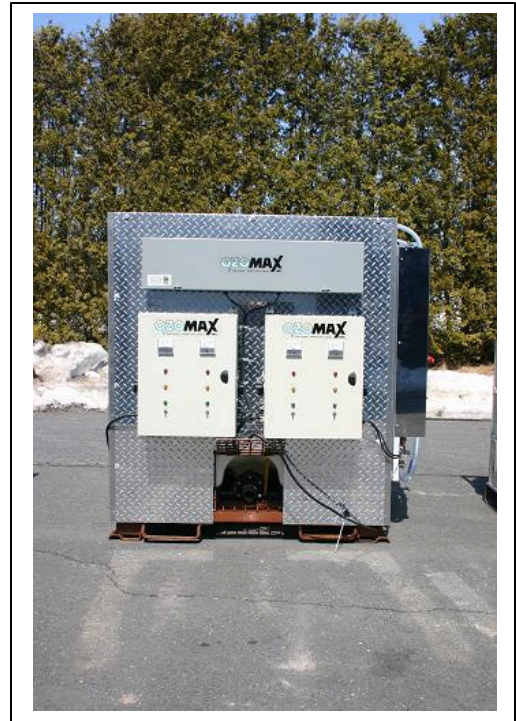


**OZOPEN- Septic with power supply 48 V DC - 20 Amps**



**OZOPEN – Septic to be installed vertically**



**TYPICAL DATA & PERFORMANCE FOR SEPTIC WATER TREATMENT**

Caractéristiques	Eau Brute (Avant traitement)	Après 15 min de traitement	Après 20 min de traitement	
Température (°C)	21	28,7	25	
pH	8,5	8,7	8,87	
TDS (p.p.m)	950	947	842	
Alcalinité (p.p.m)	180	-	-	
Dureté (p.p.m)	425	-	-	
PO4 (p.p.m)	35	12,5	12,5	
NO3 (p.p.m)	0	-	-	
NO2 (p.p.m)	0	-	-	
NH4 (p.p.m)	0-0,1	-	-	
DCO(p.p.m)	390	75	50	
Chlore total (p.p.m)	0	Bacterie totaux BHA=-0	Bacterie totaux BHA=-0	
Turbidité	-	-	-	
	terminator	terminator	terminator	

**TYPICAL Installation for septic water treatment**

