



OZOPEN- Tank Ozone Generators



Ozone Technology the World Can Afford

600 Robitaille – Shefford – Qc – Canada J2M 1X2 Tel: 450-378-6825 Fax: 450 -777-0264

Http: // www.ozomax.com

OZOPEN Portable Ozone Generators



OZOPEN WITH ACCESSORIES

Generates ozone & mixed oxidants INSITU

Treat a glass of water or a large jug quickly or tank and easily. Requires only a source of electricity. No need for any other equipment.

Kills harmful bacteria & viruses within minutes

Removes odour and bad taste from water

Portable unit can be used at home, at the office, while travelling...and can even be operated using solar panels!

!

Clean, chemical-free water the way nature intended.... At a price everyone can afford!

The OZO-PEN product line is based on OZOMAX's revolutionary patented INSITU ozone technology and other Patent pending follow-ups. These one-of-a-kind portable ozone generators produce ozone directly in water so, unlike conventional ozone generators, there is no need for compressors, air dryers, oxygen concentrators . This makes the unit completely portable and hassle-free.

Along with ozone, its unique design allows the production of hydrogen peroxide, hydroxyl radicals and other mixed oxidants. Together, the ozone and the mixed oxidants, destroy harmful bacteria and viruses that may be present in the water in a matter of minutes. In addition, these powerful oxidizing agents rid the water of colour, offensive smells and bad taste...The process is so quick and effective that anyone can produce clean, safe drinking water right in their own kitchen. Moreover, the OZO-PEN is so light and compact that it can be taken to any place where it is needed: at the office, at camp, or while travelling abroad.


The OZO -PEN product line includes:

- 1- OZO-PEN Standard model
- 2- OZO-PEN SPA
- 3- OZO-PEN TANK
- 4- OZOPEN-TANK-M

OZOPEN-TANK



OZOPEN- SPA 20 V DC- 6 A

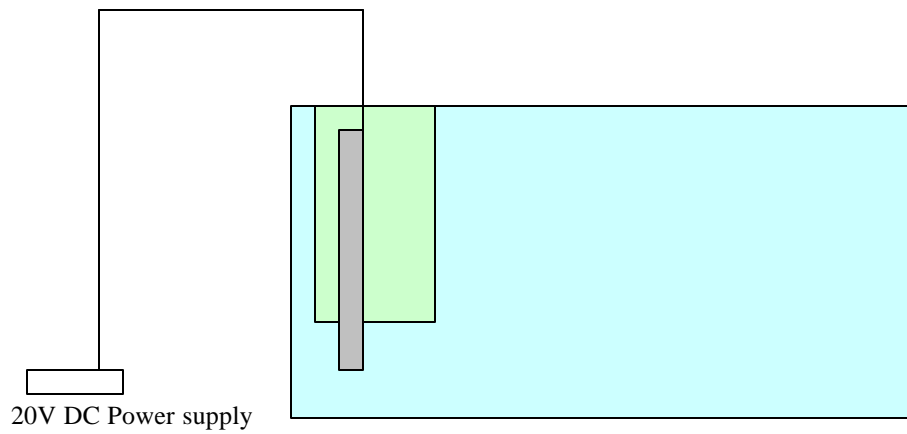

OZOPEN-TANK



OZOPEN-TANK with power supply 24 V DC - 10 Amps



TYPICAL DATA & PERFORMANCE

OZO-PEN SS 18", 120VDC Power Supply

Test kit: For Ozone Conc. Less than 2 ppm, HACH Standard DPD kit
 For Ozone Conc. > 2 ppm, McClain High Range Titration Kit

Amps (AC) Input	Volts (AC) Input	Volume Treated (L)	TDS (ppm)	NaCl Conc (g/L)	Time (min)	Ozone Conc. (ppm)
5	10	37,9 10 gallon reservoir	370	0	0	0 (DPD)
					15	0,4 (DPD)
					30	0,6 (DPD)
					60	1 (DPD)
					120	2,4 (McClain)
					150	3,2 (McClain)
					180	3,6 (McClain)
					300	5,2 (McClain)